

O2E

OPTICAL TO ELECTRICAL CONVERTER

SPECIFICATION SHEET

AVAILABLE IN PXI

AVAILABLE IN MATRIQ

FEATURES

The O2E is a high bandwidth, broadband optical to electrical converter available in a range of configurations.



Various wavelength ranges

The O2E can be customized to a wide range of wavelengths and is suitable for single mode and multimode applications.



High bandwidth

Our high performing O2E allows you to successfully test high baudrate signals with up to 50GHz of bandwidth.




Calibrated readings

Onboard storage of calibration data can be accessed via SCPI commands, making it easier to generate calibrated measurements and scale your measurement capabilities.



Amplified RF output

Various conversion gain options allow you to easily measure low power, high speed optical signals



DC or AC coupled

Choose from DC or AC coupling to suit your specific test application.

TARGET APPLICATIONS

- Optical signal eye diagram measurement
- Relative intensity noise (RIN) measurement
- Optical pulse characterization
- Modulation depth measurement
- Extinction ratio measurement
- Precision timing/triggering
- Frequency response measurement of devices

Version 1.5.8

CHOOSE YOUR FORM FACTOR

PXIe – MODULAR

Our expanding range of PXIe optical test solutions are used by customers in mixed-signal test and measurement systems, reducing complexity, lowering the cost of test and accelerating time to market.

- Multi vendor, open standard with over 2500 PXI modules available
- Advanced timing and synchronization capabilities across instruments
- Low latency, high performance processing and fast data throughput
- Design and build scalable, high channel count systems
- Small footprint and lower power consumption



MATRIQ – COMPACT & PORTABLE

The MATRIQ series provides the same high-performance test capabilities of our PXIe modules in an compact benchtop design. MATRIQ instruments are simple to setup and easy to operate, making them the perfect choice for your optical lab or test bench.

- Same performance and control as our PXIe modules
- Plug and play with USB or Ethernet connectivity
- Control via the web-based GUI, COHESIONUI or SCPI commands
- Compact and portable design saves benchtop space




Version 1.5.8

O2E TECHNICAL SPECIFICATIONS

PXI - MODULAR





O2E-1001-2-FC-PXIE

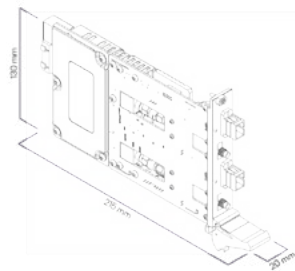

MATRIQ - COMPACT & PORTABLE



O2E-1001-2-FC-MTRQ

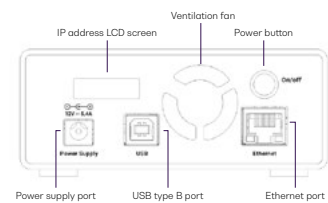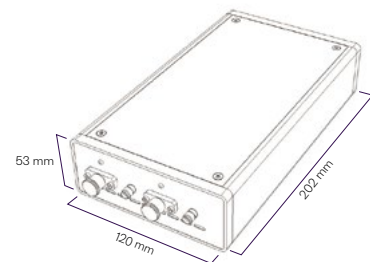

Version 1.5.8

O2E TECHNICAL SPECIFICATIONS

| General Specifications | PXI | MATRIQ |
|-----------------------------|--|--|
| Bus connection | PXIe | USB and Ethernet |
| PXI slots | 1 | - |
| Number of channels | 1 or 2 | 1 or 2 |
| Optical connector type | FC/PC, FC/APC, SC/APC, SC/PC | FC/PC, FC/APC, SC/APC, SC/PC |
| Dimensions (HxWxD) | 130 mm x 20 mm x 215 mm 5.1" x 0.8" x 8.5" | 45 x 114 x 212 mm 1.7 x 4.5 x 8.3 inch |
| Weight | ~ 1 kg ~2.2 lbs | ~ 1.1 kg ~ 2.4 lbs |
| Operating temperature range | 5 °C to 45 °C 41 °F to 113 °F | 5 °C to 45 °C 41 °F to 113 °F |
| Storage temperature range | -40 °C to 70 °C -40 °F to 158 °F | -40 °C to 70 °C -40 °F to 158 °F |

| Power Specifications | PXI | MATRIQ |
|------------------------|---|--|
| AC input voltage range | Please refer to the latest PXI Express Hardware Specifications published by the PXI Systems Alliance. | 90 to 264 VAC |
| AC input current | | 1.3A (115 Vac), 0.9A (230 Vac) |
| AC frequency range | | 47 to 63 Hz |
| DC output voltage | | 12 V |
| DC output current max | | 5.41 A |
| Dimensions (LxWxH) | | 4.58 x 2.06 x 1.23" (116.3 x 52.4 x 31.3 mm) |

| Model Number | 1001 | 1001 |
|-------------------------------------|--|--|
| Bandwidth | 9.5 GHz (typ), 8.5 GHz (min) | 9.5 GHz (typ), 8.5 GHz (min) |
| Wavelength | 750 to 1650 nm | 750 to 1650 nm |
| Calibrated wavelengths (nm) | 850, 1310, 1490, 1550 | 850, 1310, 1490, 1550 |
| RF coupling | DC | DC |
| RF connector | SMA (3.5 mm) | SMA (3.5 mm) |
| RF impedance | 50 ohms | 50 ohms |
| Fiber | 62.5µ core MMF | 62.5µ core MMF |
| Damage level peak power | +7 dBm | +7 dBm |
| Optical return loss | 30 dB SMF1 16 dB MMF | 30 dB SMF1 16 dB MMF |
| PDL at 1550 nm | - | - |
| Conversion gain | 430 V/W (typ), 375 V/W (min) at 1550 nm 450 V/W (typ), 394 V/W (min) at 1310 nm 250 V/W (typ), 221 V/W (min) at 850 nm | 430 V/W (typ), 375 V/W (min) at 1550 nm 450 V/W (typ), 394 V/W (min) at 1310 nm 250 V/W (typ), 221 V/W (min) at 850 nm |
| Low frequency cutoff | 0 Hz | 0 Hz |
| Noise equivalent power ¹ | 15 pW/sqrt(Hz) (typ) | 15 pW/sqrt(Hz) (typ) |
| Average power reading | Yes | Yes |

Version 1.5.8

| Model Number | 1101 ² | 1101 ² |
|-------------------------------------|---|---|
| Bandwidth | 25 GHz (typ), 24 GHz (min) | 25 GHz (typ), 24 GHz (min) |
| Wavelength | 950 to 1650 nm | 950 to 1650 nm |
| Calibrated wavelengths (nm) | 1310, 1490, 1550 | 1310, 1490, 1550 |
| RF coupling | AC | AC |
| RF connector | K (2.92 mm) | K (2.92 mm) |
| RF impedance | 50 ohms | 50 ohms |
| Fiber | SMF-28 | SMF-28 |
| Damage level peak power | +4 dBm | +4 dBm |
| Optical return loss | 30 dB SMF1 | 30 dB SMF1 |
| PDL at 1550 nm | 0.25 dB (max) | 0.25 dB (max) |
| Conversion gain | 900 V/W (typ), 700 V/W (min) at 1550 nm | 900 V/W (typ), 700 V/W (min) at 1550 nm |
| Low frequency cutoff | < 100 KHz | < 100 KHz |
| Noise equivalent power ¹ | 39.7 pW/sqrt(Hz) (typ) | 39.7 pW/sqrt(Hz) (typ) |
| Average power reading | Yes | Yes |

| Model Number | 1201 ² | 1201 ² |
|-------------------------------------|--|--|
| Bandwidth | 35 GHz (typ), 30 GHz (min) | 35 GHz (typ), 30 GHz (min) |
| Wavelength | 800 to 1650 nm | 800 to 1650 nm |
| Calibrated wavelengths (nm) | 850, 1310, 1490, 1550 | 850, 1310, 1490, 1550 |
| RF coupling | DC | DC |
| RF connector | 2.4 mm | 2.4 mm |
| RF impedance | 50 ohms | 50 ohms |
| Fiber | 50µ core MMF | 50µ core MMF |
| Damage level peak power | +8 dBm | +8 dBm |
| Optical return loss | 24 dB SMF1 14 dB MMF | 24dB SMF1 14 dB MMF |
| PDL at 1550 nm | - | - |
| Conversion gain | 100 V/W (typ) at 1550 nm 100 V/W (typ) at 1310 nm 70 V/W (typ) at 850 nm | 100 V/W (typ) at 1550 nm 100 V/W (typ) at 1310 nm 70 V/W (typ) at 850 nm |
| Low frequency cutoff | 0 Hz | 0 Hz |
| Noise equivalent power ¹ | 39.7 pW/sqrt(Hz) (typ) | 39.7 pW/sqrt(Hz) (typ) |
| Average power reading | Yes | Yes |

Version 1.5.8

| Model Number | 1301 ² | 1301 ² |
|-------------------------------------|----------------------------|----------------------------|
| Bandwidth | 50 GHz (typ) | 50 GHz (typ) |
| Wavelength | 1200 to 1650 nm | 1200 to 1650 nm |
| Calibrated wavelengths (nm) | 1310, 1490, 1550 | 1310, 1490, 1550 |
| RF coupling | DC | DC |
| RF connector | V (1.85 mm) | V (1.85 mm) |
| RF impedance | 50 ohms | 50 ohms |
| Fiber | SMF-28 | SMF-28 |
| Damage level peak power | +8 dBm | +8 dBm |
| Optical return loss | 30 dB SMF1 | 30 dB SMF1 |
| PDL at 1550 nm | 0.1 dB (typ), 0.2 dB (max) | 0.1 dB (typ), 0.2 dB (max) |
| Conversion gain | 90 V/W (typ) at 1310 nm | 90 V/W (typ) at 1310 nm |
| Low frequency cutoff | 0 Hz | 0 Hz |
| Noise equivalent power ¹ | 41 pW/sqrt(Hz) (typ) | 41 pW/sqrt(Hz) (typ) |
| Average power reading | Yes | Yes |

| Model Number | 1401 ² | 1401 ² |
|-------------------------------------|--|--|
| Bandwidth | 9 GHz (typ), 8GHz (min) | 9 GHz (typ), 8GHz (min) |
| Wavelength | 750 to 1650 nm | 750 to 1650 nm |
| Calibrated wavelengths (nm) | 1271, 1291, 1311, 1331, 1351, 1371, 1391, 1411, 1310, 1490, 1550 | 1271, 1291, 1311, 1331, 1351, 1371, 1391, 1411, 1310, 1490, 1550 |
| RF coupling | AC | AC |
| RF connector | SMA | SMA |
| RF impedance | 50 ohms | 50 ohms |
| Fiber | 62.5 μ core MMF | 62.5 μ core MMF |
| Damage level peak power | +7 dBm | +7 dBm |
| Optical return loss | 16 dB | 16 dB |
| PDL at 1550 nm | - | - |
| Conversion gain | 10,000 V/W (typ), 7,000 V/W (min) at 1310 nm | 10,000 V/W (typ), 7,000 V/W (min) at 1310 nm |
| Low frequency cutoff | < 100 KHz | < 100 KHz |
| Noise equivalent power ¹ | 25.6 nW/sqrt(Hz) (typ) | 25.6 nW/sqrt(Hz) (typ) |
| Average power reading | Yes | Yes |

Version 1.5.8

| Model Number | 1402 ² | 1402 ² |
|-------------------------------------|--|--|
| Bandwidth | 9 GHz (typ), 8GHz (min) | 9 GHz (typ), 8GHz (min) |
| Wavelength | 750 to 1650 nm | 750 to 1650 nm |
| Calibrated wavelengths (nm) | 850, 1310, 1490, 1550 | 850, 1310, 1490, 1550 |
| RF coupling | AC | AC |
| RF connector | SMA | SMA |
| RF impedance | 50 ohms | 50 ohms |
| Fiber | 62.5 μ core MMF | 62.5 μ core MMF |
| Damage level peak power | +7 dBm | +7 dBm |
| Optical return loss | 16 dB | 16 dB |
| PDL at 1550 nm | - | - |
| Conversion gain | 10,000 V/W (typ), 7,000 V/W (min) at 1310 nm | 10,000 V/W (typ), 7,000 V/W (min) at 1310 nm |
| Low frequency cutoff | < 100 KHz | < 100 KHz |
| Noise equivalent power ¹ | 25.6 nW/sqrt(Hz) (typ) | 25.6 nW/sqrt(Hz) (typ) |
| Average power reading | Yes | Yes |

| Model Number | 1403 ² | 1403 ² |
|-------------------------------------|---|---|
| Bandwidth | 9 GHz (typ), 8 GHz (min) | 9 GHz (typ), 8 GHz (min) |
| Wavelength | 750 to 1650 nm | 750 to 1650 nm |
| Calibrated wavelengths (nm) | 850, 1310, 1490, 1550 | 850, 1310, 1490, 1550 |
| RF coupling | AC | AC |
| RF connector | SMA | SMA |
| RF impedance | 50 ohms | 50 ohms |
| Fiber | 62.5u MMF | 62.5u MMF |
| Damage level peak power | 7 dBm | 7 dBm |
| Optical return loss | 16 dB | 16 dB |
| PDL at 1550 nm | - | - |
| Conversion gain | 17,000 V/W (typ), 10,000 V/W (min) at 1310 nm | 17,000 V/W (typ), 10,000 V/W (min) at 1310 nm |
| Low frequency cutoff | <100 kHz | <100 kHz |
| Noise equivalent power ¹ | 43 pW/sqrt(Hz) (typ) | 43 pW/sqrt(Hz) (typ) |
| Average power reading | Yes | Yes |

SPECS AS OF FEBRUARY 2022

Notes

1. At wavelength with maximum conversion gain.

2. Preliminary specs.

Version 1.5.8

ORDERING INFORMATION

| | |
|---------------------------|--|
| Model number | 1001 = 9.5 GHz, DC coupled, conversion gain of 430 V/W |
| | 1101 = 25 GHz, AC coupled, conversion gain of 900 V/W |
| | 1201 = 35 GHz, DC coupled, conversion gain of 100 V/W |
| | 1301 = 50 GHz, DC coupled, conversion gain of 90 V/W |
| | 1401 = 9 GHz, AC coupled, conversion gain of 10,000 V/W (CWDM8 calibration) |
| | 1402 = 9 GHz, AC coupled, conversion gain of 10,000 V/W |
| | 1403 = 9 GHz, AC coupled, conversion gain of 17,000 V/W |
| Connector type | FC = FC/PC |
| | FA = FC/APC |
| | SC = SC/PC |
| | SA = SC/APC |
| Number of channels | 1 = 1 channel |
| | 2 = 2 channels |

O2E - XXXX - X - XX - PXIE
O2E - XXXX - X - XX - MTRQ

WARRANTY INFORMATION

This product comes with a standard 1 year warranty.

Version 1.5.8

EXTENDED WARRANTIES AND CALIBRATION PLANS

With an Extended Warranty and Calibration Plan you can spend more time focused on your priorities and less time worrying about maintenance.

Over time and with regular use, all optical parts and connectors require re-calibration and maintenance to guarantee accurate and reliable performance.

Add a 3 or 5 year Extended Warranty at the time of purchase.

Guarantee peak performance

Ensure your equipment is operating at its best for reliable and accurate results.

Lower cost of ownership

Lock in savings and maximise your budget with a lower cost of ownership.

Peace of mind

Spend less time worrying about maintenance and more on generating results.

CALIBRATION PLANS FOR ADDITIONAL DISCOUNTS

Order a Calibration Plan when you purchase your Quantifi Photonics' test instruments and qualify for additional discounts.

10% Discount

On calibrations ordered at the time of purchase.

25% Discount

Add on an extended warranty and receive a 25% discount on calibrations.

With an instrument calibration performed by Quantifi Photonics technicians you receive.

- Comprehensive calibration to factory specifications.
- End-to-end inspection to ensure all instrument functions are working and connectors are clean.
- Firmware, software and documentation updates.
- Certificate of Calibration which includes detailed test results.

We recommend Quantifi Photonics optical instruments are re-calibrated every 12 months.

How to purchase

Contact your Quantifi Photonics sales representative about our Extended Warranty or Calibration Plans or email sales@quantifiphotonics.com.

Extended Warranties and Calibration Plans must be ordered at the time of purchase and are available only for Quantifi Photonics' products. The 25% calibration discount only applies to calibrations while the product is covered by the Extended Warranty period.

Version 1.5.8

CATALOGUE

Our portfolio of optical and electrical test modules is rapidly expanding to meet a wide range of customer requirements and applications.

Tunable Laser Sources

Versatile telecom laser sources with full tunability across C or L bands. Narrow 100 kHz linewidth, up to 16.5 dBm of power, optional whisper mode to disable frequency dither.

Erbium-Doped Fiber Amplifier (EDFA)

High power Erbium-Doped Fiber Amplifier for signal power amplification in C and L bands with various control modes, including automatic gain control.

Fixed Wavelength Laser Sources

Highly customizable DFB or FP laser sources available in a wide range of wavelengths and powers. Models support SMF, MMF and PMF.

Variable Optical Attenuator (VOA)

Fast attenuation speed with low insertion loss and built-in power monitoring. Operates in fixed attenuation or constant output power modes. Models support SMF, MMF and PMF.

Optical Power Meters

Fast terminating or inline monitoring of optical signal power from -60 to +10 dBm across 750 - 1700 nm wavelengths. Model with logarithmic analog output for applications such as silicon photonics fiber alignment.

Optical Spectrum Analyzer (OSA)

Low cost, fast spectral measurement in a compact module with built-in analysis including SMSR, OSNR and spectral width. Targeted wavelengths for specific applications in O band, C band and L band.

Optical-to-Electrical Converter

High bandwidth, broadband O-to-E converter. Available in a range of configurations; choose from 1 or 2 channels, AC or DC coupling and various conversion gain and operating wavelength ranges.

Bit Error Rate Tester (BERT)

2 or 4-channel Pulse Pattern Generator and Error Detector at rates up to 29 Gbps for the design, characterization and production of optical transceivers and opto-electrical components.

Pulse Pattern Generator (PPG)

4 channel Pulse Pattern Generator from 0.3 to 30 Gbps for high-density multichannel applications. With integrated clock synthesizer and programmable de-emphasis and CTLE processor.

Optical Switch

Proven reliability and fast switching time. Wide variety of switch configurations: 1x4, 1x16, 16x16 and more. Models support SMF, MMF and PMF.

Polarization Controller & Scrambler

High-speed automated polarization control with broad wavelength coverage from 1260nm to 1650nm, low insertion loss and back reflection. Full remote control via intuitive GUI, LabVIEW or SCPI.

Photonic Doppler Velocimeter (PDV)

Purpose-built module for Photonic Doppler Velocimetry (PDV). A circulator, two VOAs and a passive coupler all built into one compact module.

Passive Component Integration

Integrate passive optical components of your choice such as WDM couplers, splitters, band-pass filters, PM beamsplitters and circulators. Models support SMF, MMF and PMF.

Passive Component Storage

Protect and store your own passive fiber optic components such as splitters, connector adaptor patchcords, WDM couplers, and isolators in one handy module.

PXI - TEST MODULES

MATRIQ - TEST MODULES

We provide these products as PXIe modules and compact MATRIQ benchtop instruments.

Version 1.5.8

WHY CHOOSE QUANTIFI PHOTONICS

Test. Measure. Solve.™

Quantifi Photonics is transforming the world of photonics test and measurement. Our portfolio of optical and electrical test instruments is rapidly expanding to meet the needs of engineers and scientists around the globe. From enabling ground-breaking experiments to driving highly efficient production testing, you'll find us working with customers to solve complex problems with experience and innovation.

To find out more, get in touch with us today.



© 2022 Quantifi Photonics Ltd. All rights reserved. No part of this publication may be reproduced, adapted, or translated in any form or by any means without the prior permission from Quantifi Photonics Ltd. All specifications are subject to change without notice. Please contact Quantifi Photonics for the latest information.

Version 1.5.8